

Solai con lamiera collaboranti





Floors with collaborating sheets

Decken mit Verbundblechen

Planchers avec tôles associées

Suelos con chapas colaborantes

EGB 1200 H=12 cm

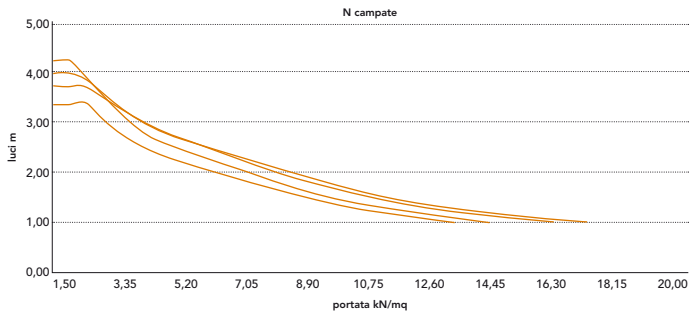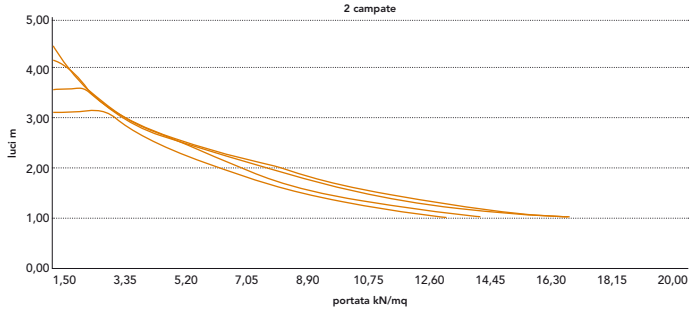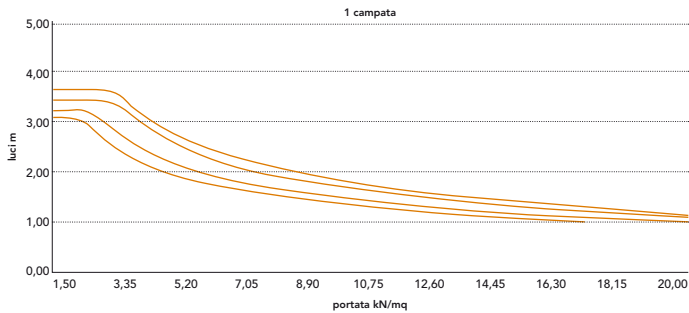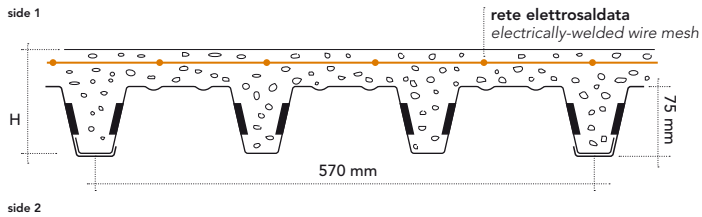

EGB 1200 H=12 cm

Caratteristiche del profilo Section properties

Spessore Thickness	Peso Weight	
	kg/m ²	kg/m
0,7 mm	9,64	5,50
0,8 mm	11,02	6,28
1,0 mm	13,77	7,85
1,2 mm	16,53	9,42

CARATTERISTICHE

Characteristics
Eigenschaften
Caractéristiques
Características

Rete ø 6 mm
a maglia saldata
da 150x150 mm

Grid ø 6 mm
welded mesh
150x150 mm

Nutzung und Anwendung
Geflecht ø 6 mm mit
geschweißten Maschen
zu 150x150 mm

Grille ø 6 mm
à maille soudée
de 150x150 mm

Malla electrosoldada
150x150 mm (Ø 6 mm)

EGB 1200 H=12 cm ▲▲ 1 campata 1 span																
Spessore Thickness	Sovraccarico di esercizio utile uniformemente distribuito kN/m ² - Useful working overload, uniformly distributed (kN/m ²)															
mm	1,50	2,00	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00	7,00	8,00	10,00	12,00	15,00	20,00
	Luce massima in m per solai - Maximum span in m for floors															
0,7	3.10	3.10	2.99	2.68	2.44	2.26	2.11	1.99	1.88	1.79	1.64	1.52	1.34	1.22	1.08	0.92
0,8	3.25	3.25	3.25	3.03	2.75	2.53	2.36	2.21	2.09	1.98	1.81	1.67	1.47	1.32	1.17	0.99
1,0	3.45	3.45	3.45	3.45	3.35	3.05	2.82	2.63	2.47	2.33	2.11	1.94	1.68	1.51	1.32	1.09
1,2	3.65	3.65	3.65	3.65	3.54	3.24	3.00	2.80	2.63	2.49	2.25	2.07	1.81	1.62	1.42	1.09

EGB 1200 H=12 cm ▲▲▲ 2 campate 2 spans																
Spessore Thickness	Sovraccarico di esercizio utile uniformemente distribuito kN/m ² - Useful working overload, uniformly distributed (kN/m ²)															
mm	1,50	2,00	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00	7,00	8,00	10,00	12,00	15,00	20,00
	Luce massima in m per solai - Maximum span in m for floors															
0,7	3.15	3.15	3.15	3.15	2.90	2.68	2.50	2.35	2.22	2.11	1.85	1.62	1.29	1.08	0.86	0.65
0,8	3.60	3.60	3.60	3.29	3.05	2.85	2.69	2.55	2.43	2.32	1.99	1.74	1.39	1.16	0.93	0.70
1,0	4.20	4.03	3.61	3.29	3.05	2.85	2.69	2.55	2.43	2.33	2.15	1.96	1.57	1.31	1.05	0.78
1,2	4.50	4.03	3.61	3.29	3.05	2.85	2.69	2.55	2.43	2.33	2.15	2.02	1.64	1.36	1.09	0.82

EGB 1200 H=12 cm ▲▲▲▲ N campate N spans																
Spessore Thickness	Sovraccarico di esercizio utile uniformemente distribuito kN/m ² - Useful working overload, uniformly distributed (kN/m ²)															
mm	1,50	2,00	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00	7,00	8,00	10,00	12,00	15,00	20,00
	Luce massima in m per solai - Maximum span in m for floors															
0,7	3.40	3.40	3.40	3.40	3.28	2.99	2.76	2.57	2.41	2.22	1.90	1.66	1.33	1.11	0.89	0.67
0,8	3.75	3.75	3.75	3.50	3.17	2.91	2.71	2.53	2.39	2.27	2.05	1.79	1.43	1.20	0.96	0.72
1,0	4.00	4.00	3.89	3.55	3.29	3.07	2.90	2.75	2.62	2.51	2.31	2.02	1.62	1.35	1.08	0.81
1,2	4.25	4.25	3.89	3.55	3.29	3.07	2.90	2.75	2.62	2.51	2.32	2.11	1.69	1.41	1.12	0.84

Solai con lamiera collaboranti





Floors with collaborating sheets

Decken mit Verbundblechen

Planchers avec tôles associées

Suelos con chapas colaborantes

EGB 1200 H=13 cm

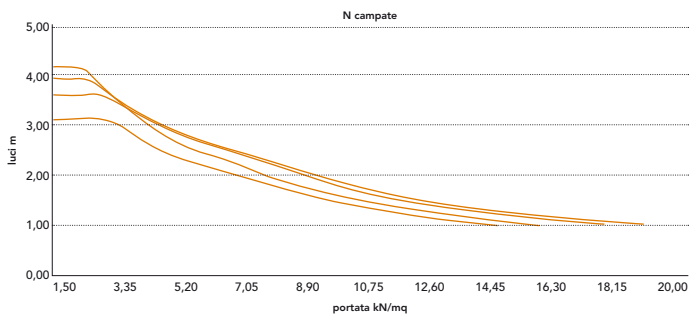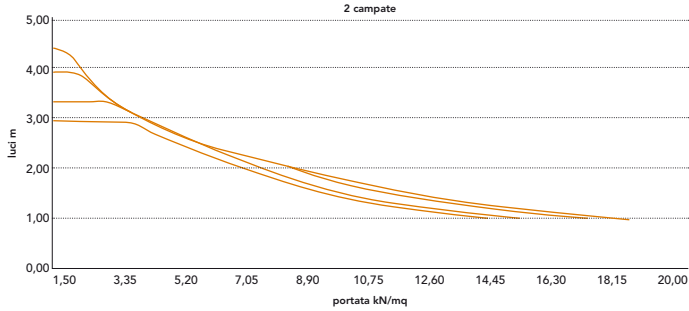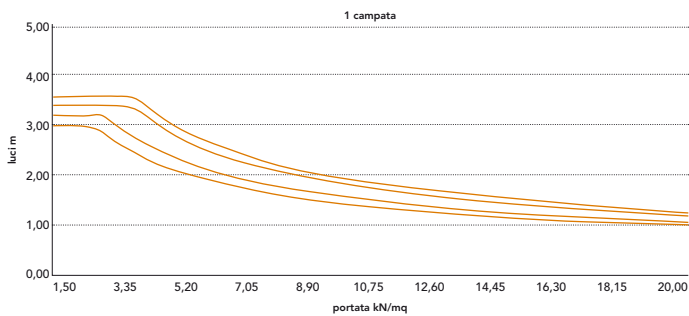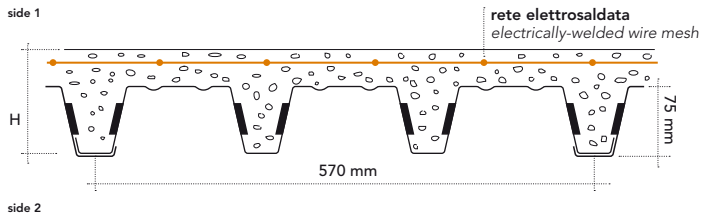

EGB 1200 H=13 cm

Caratteristiche del profilo Section properties

Spessore Thickness	Peso Weight	
	kg/m ²	kg/m
mm		
0,7	9,64	5,50
0,8	11,02	6,28
1,0	13,77	7,85
1,2	16,53	9,42

CARATTERISTICHE

Characteristics
Eigenschaften
Caractéristiques
Características

Rete ø 6 mm
a maglia saldata
da 150x150 mm

Grid ø 6 mm
welded mesh
150x150 mm

Nutzung und Anwendung
Geflecht ø 6 mm mit
geschweißten Maschen
zu 150x150 mm

Grille ø 6 mm
à maille soudée
de 150x150 mm

Malla electrosoldada
150x150 mm (Ø 6 mm)

EGB 1200 H=13 cm ▲▲ 1 campata 1 span																
Spessore Thickness	Sovraccarico di esercizio utile uniformemente distribuito kN/m ² - Useful working overload, uniformly distributed (kN/m ²)															
mm	1,50	2,00	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00	7,00	8,00	10,00	12,00	15,00	20,00
	Luce massima in m per solai - Maximum span in m for floors															
0,7	3.00	3.00	3.00	2.89	2.64	2.44	2.27	2.14	2.03	1.93	1.76	1.64	1.44	1.31	1.16	0.99
0,8	3.20	3.20	3.20	3.20	2.99	2.74	2.55	2.39	2.26	2.14	1.95	1.80	1.58	1.42	1.25	1.07
1,0	3.40	3.40	3.40	3.40	3.40	3.34	3.08	2.87	2.69	2.54	2.29	2.10	1.83	1.63	1.42	1.20
1,2	3.60	3.60	3.60	3.60	3.60	3.53	3.26	3.04	2.86	2.70	2.44	2.25	1.95	1.75	1.53	1.24

EGB 1200 H=13 cm ▲▲▲ 2 campate 2 spans																
Spessore Thickness	Sovraccarico di esercizio utile uniformemente distribuito kN/m ² - Useful working overload, uniformly distributed (kN/m ²)															
mm	1,50	2,00	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00	7,00	8,00	10,00	12,00	15,00	20,00
	Luce massima in m per solai - Maximum span in m for floors															
0,7	2.95	2.95	2.95	2.95	2.95	2.89	2.69	2.53	2.39	2.27	2.01	1.76	1.41	1.17	0.94	0.70
0,8	3.35	3.35	3.35	3.35	3.23	3.02	2.85	2.70	2.57	2.46	2.17	1.90	1.52	1.27	1.01	0.76
1,0	3.95	3.95	3.82	3.49	3.23	3.02	2.85	2.70	2.57	2.46	2.28	2.13	1.71	1.42	1.14	0.85
1,2	4.45	4.27	3.82	3.49	3.23	3.02	2.85	2.70	2.57	2.46	2.28	2.13	1.78	1.49	1.19	0.89

EGB 1200 H=13 cm ▲▲▲▲ N campate N spans																
Spessore Thickness	Sovraccarico di esercizio utile uniformemente distribuito kN/m ² - Useful working overload, uniformly distributed (kN/m ²)															
mm	1,50	2,00	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00	7,00	8,00	10,00	12,00	15,00	20,00
	Luce massima in m per solai - Maximum span in m for floors															
0,7	3.15	3.15	3.15	3.15	3.01	2.78	2.59	2.44	2.30	2.19	2.00	1.81	1.45	1.21	0.97	0.73
0,8	3.65	3.65	3.65	3.65	3.44	3.16	2.93	2.74	2.59	2.45	2.23	1.95	1.56	1.30	1.04	0.78
1,0	3.95	3.95	3.95	3.76	3.48	3.25	3.07	2.91	2.78	2.66	2.46	2.20	1.76	1.47	1.17	0.88
1,2	4.20	4.20	4.12	3.76	3.48	3.25	3.07	2.91	2.78	2.66	2.46	2.30	1.84	1.53	1.22	0.92

Solai con lamiera collaboranti





Floors with collaborating sheets

Decken mit Verbundblechen

Planchers avec tôles associées

Suelos con chapas colaborantes

EGB 1200 H=14 cm

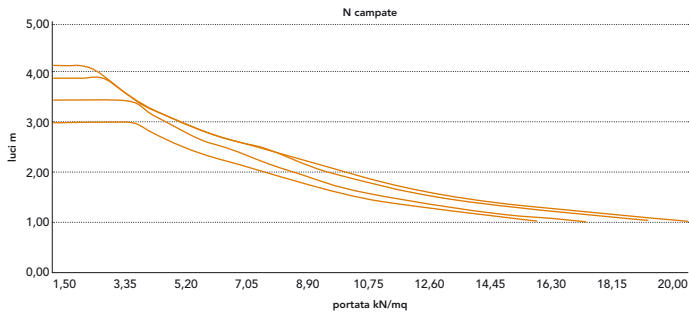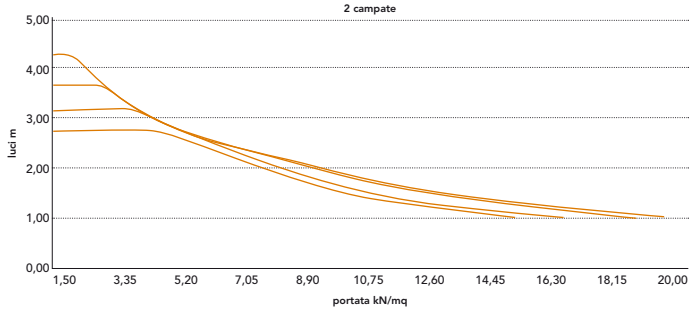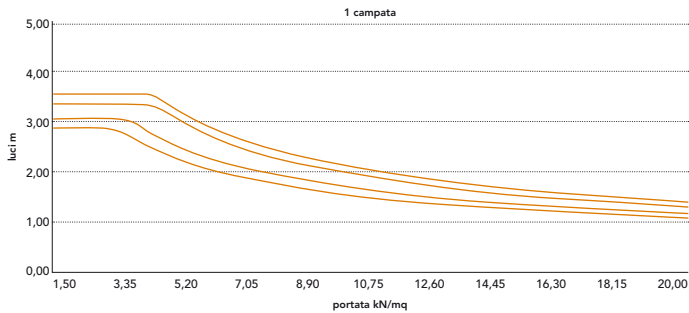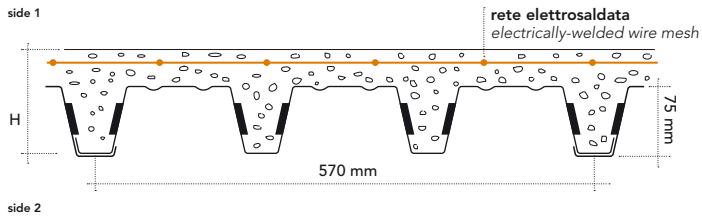

EGB 1200 H=14 cm

Caratteristiche del profilo Section properties

Spessore Thickness	Peso Weight	
	kg/m ²	kg/m
mm		
0,7	9,64	5,50
0,8	11,02	6,28
1,0	13,77	7,85
1,2	16,53	9,42

CARATTERISTICHE

Characteristics
Eigenschaften
Caractéristiques
Características

Rete ø 6 mm
a maglia saldata
da 150x150 mm

Grid ø 6 mm
welded mesh
150x150 mm

Nutzung und Anwendung
Geflecht ø 6 mm mit
geschweißten Maschen
zu 150x150 mm

Grille ø 6 mm
à maille soudée
de 150x150 mm

Malla electrosoldada
150x150 mm (Ø 6 mm)

EGB 1200 H=14 cm																▲ ▲ 1 campata 1 span
Spessore Thickness	Sovraccarico di esercizio utile uniformemente distribuito kN/m ² - Useful working overload, uniformly distributed (kN/m ²)															
mm	1,50	2,00	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00	7,00	8,00	10,00	12,00	15,00	20,00
	Luce massima in m per solai - Maximum span in m for floors															
0,7	2.90	2.90	2.90	2.90	2.82	2.61	2.43	2.29	2.16	2.06	1.88	1.75	1.54	1.39	1.23	1.05
0,8	3.05	3.05	3.05	3.05	3.05	2.95	2.74	2.56	2.42	2.29	2.09	1.93	1.69	1.52	1.34	1.14
1,0	3.35	3.35	3.35	3.35	3.35	3.35	3.33	3.10	2.90	2.74	2.47	2.26	1.96	1.75	1.52	1.28
1,2	3.55	3.55	3.55	3.55	3.55	3.55	3.52	3.28	3.08	2.91	2.63	2.41	2.10	1.87	1.64	1.38

EGB 1200 H=14 cm																▲ ▲ ▲ 2 campate 2 spans
Spessore Thickness	Sovraccarico di esercizio utile uniformemente distribuito kN/m ² - Useful working overload, uniformly distributed (kN/m ²)															
mm	1,50	2,00	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00	7,00	8,00	10,00	12,00	15,00	20,00
	Luce massima in m per solai - Maximum span in m for floors															
0,7	2.75	2.75	2.75	2.75	2.75	2.75	2.75	2.71	2.56	2.43	2.17	1.90	1.52	1.27	1.01	0.76
0,8	3.20	3.20	3.20	3.20	3.20	3.18	3.00	2.84	2.71	2.59	2.34	2.05	1.64	1.37	1.09	0.82
1,0	3.70	3.70	3.70	3.67	3.40	3.18	3.00	2.84	2.71	2.59	2.40	2.25	1.84	1.54	1.23	0.92
1,2	4.30	4.30	4.02	3.67	3.40	3.18	3.00	2.84	2.71	2.59	2.40	2.25	1.93	1.60	1.28	0.96

EGB 1200 H=14 cm																▲ ▲ ▲ ▲ N campate N spans
Spessore Thickness	Sovraccarico di esercizio utile uniformemente distribuito kN/m ² - Useful working overload, uniformly distributed (kN/m ²)															
mm	1,50	2,00	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00	7,00	8,00	10,00	12,00	15,00	20,00
	Luce massima in m per solai - Maximum span in m for floors															
0,7	3.00	3.00	3.00	3.00	3.00	2.98	2.78	2.61	2.46	2.34	2.14	1.96	1.57	1.30	1.04	0.78
0,8	3.45	3.45	3.45	3.45	3.45	3.40	3.15	2.95	2.78	2.63	2.39	2.11	1.69	1.41	1.12	0.84
1,0	3.90	3.90	3.90	3.90	3.66	3.43	3.23	3.06	2.92	2.80	2.59	2.37	1.90	1.58	1.27	0.95
1,2	4.15	4.15	4.15	3.96	3.66	3.43	3.23	3.06	2.92	2.80	2.59	2.42	1.98	1.65	1.32	0.99

Solai con lamiera collaboranti





Floors with collaborating sheets

Decken mit Verbundblechen

Planchers avec tôles associées

Suelos con chapas colaborantes

EGB 1200 H=15 cm

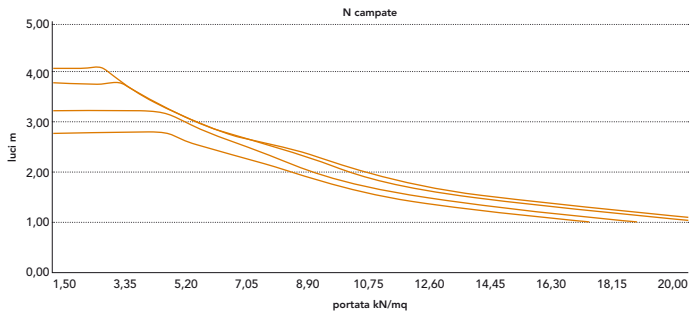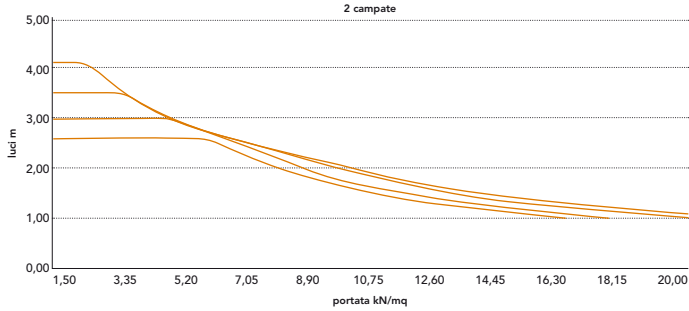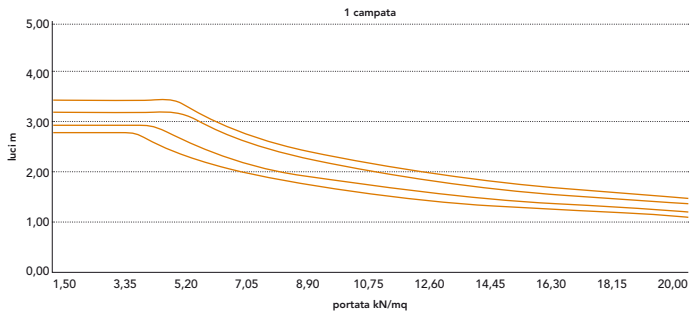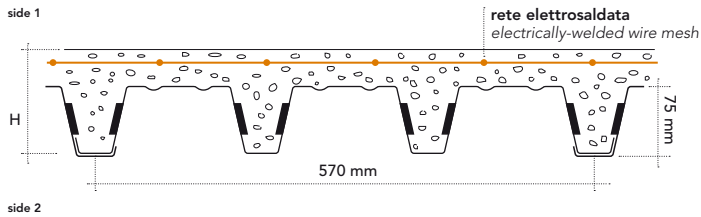

EGB 1200 H=15 cm

Caratteristiche del profilo Section properties

Spessore Thickness	Peso Weight	
	kg/m ²	kg/m
mm		
0,7	9,64	5,50
0,8	11,02	6,28
1,0	13,77	7,85
1,2	16,53	9,42

CARATTERISTICHE

Characteristics
Eigenschaften
Caractéristiques
Características

Rete ø 6 mm
a maglia saldata
da 150x150 mm

Grid ø 6 mm
welded mesh
150x150 mm

Nutzung und Anwendung
Geflecht ø 6 mm mit
geschweißten Maschen
zu 150x150 mm

Grille ø 6 mm
à maille soudée
de 150x150 mm

Malla electrosoldada
150x150 mm (Ø 6 mm)

EGB 1200 H=15 cm																▲ ▲ 1 campata 1 span
Spessore Thickness	Sovraccarico di esercizio utile uniformemente distribuito kN/m ² - Useful working overload, uniformly distributed (kN/m ²)															
mm	1,50	2,00	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00	7,00	8,00	10,00	12,00	15,00	20,00
	Luce massima in m per solai - Maximum span in m for floors															
0,7	2.80	2.80	2.80	2.80	2.80	2.77	2.58	2.43	2.30	2.18	2.00	1.85	1.63	1.47	1.30	1.11
0,8	2.95	2.95	2.95	2.95	2.95	2.95	2.92	2.73	2.58	2.44	2.22	2.05	1.79	1.61	1.42	1.20
1,0	3.20	3.20	3.20	3.20	3.20	3.20	3.20	3.20	3.11	2.93	2.64	2.42	2.09	1.87	1.62	1.36
1,2	3.45	3.45	3.45	3.45	3.45	3.45	3.45	3.45	3.30	3.11	2.81	2.58	2.24	2.00	1.74	1.47

EGB 1200 H=15 cm																▲ ▲ ▲ 2 campate 2 spans
Spessore Thickness	Sovraccarico di esercizio utile uniformemente distribuito kN/m ² - Useful working overload, uniformly distributed (kN/m ²)															
mm	1,50	2,00	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00	7,00	8,00	10,00	12,00	15,00	20,00
	Luce massima in m per solai - Maximum span in m for floors															
0,7	2.60	2.60	2.60	2.60	2.60	2.60	2.60	2.60	2.60	2.58	2.33	2.04	1.63	1.36	1.09	0.81
0,8	3.00	3.00	3.00	3.00	3.00	3.00	3.00	2.98	2.84	2.72	2.51	2.19	1.75	1.46	1.17	0.88
1,0	3.50	3.50	3.50	3.50	3.50	3.33	3.14	2.98	2.84	2.72	2.52	2.35	1.97	1.65	1.32	0.99
1,2	4.10	4.10	4.10	3.84	3.56	3.33	3.14	2.98	2.84	2.72	2.52	2.35	2.06	1.72	1.37	1.03

EGB 1200 H=15 cm																▲ ▲ ▲ ▲ N campate N spans
Spessore Thickness	Sovraccarico di esercizio utile uniformemente distribuito kN/m ² - Useful working overload, uniformly distributed (kN/m ²)															
mm	1,50	2,00	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00	7,00	8,00	10,00	12,00	15,00	20,00
	Luce massima in m per solai - Maximum span in m for floors															
0,7	2.80	2.80	2.80	2.80	2.80	2.80	2.80	2.77	2.62	2.49	2.27	2.10	1.68	1.40	1.12	0.84
0,8	3.25	3.25	3.25	3.25	3.25	3.25	3.25	3.15	2.96	2.80	2.55	2.26	1.81	1.51	1.20	0.90
1,0	3.80	3.80	3.80	3.80	3.80	3.59	3.38	3.21	3.06	2.93	2.71	2.54	2.03	1.69	1.36	1.02
1,2	4.10	4.10	4.10	4.10	3.84	3.59	3.38	3.21	3.06	2.93	2.71	2.54	2.12	1.77	1.41	1.06